

FIG. 2


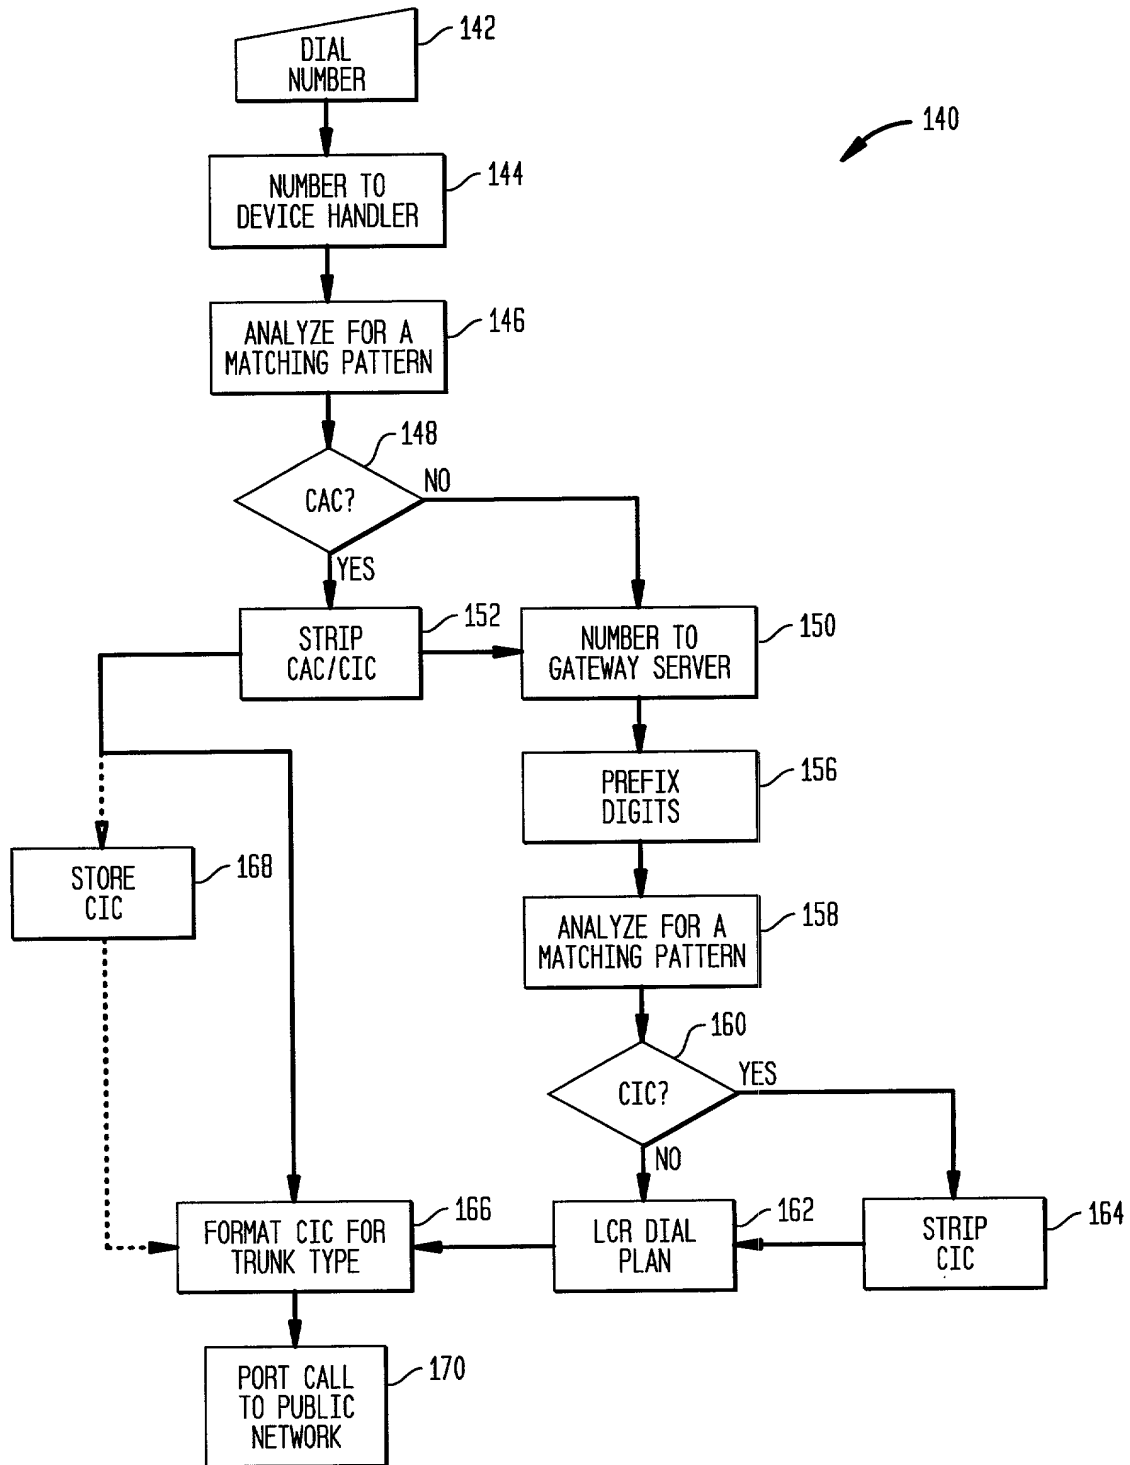


FIG. 3



2002P01701US

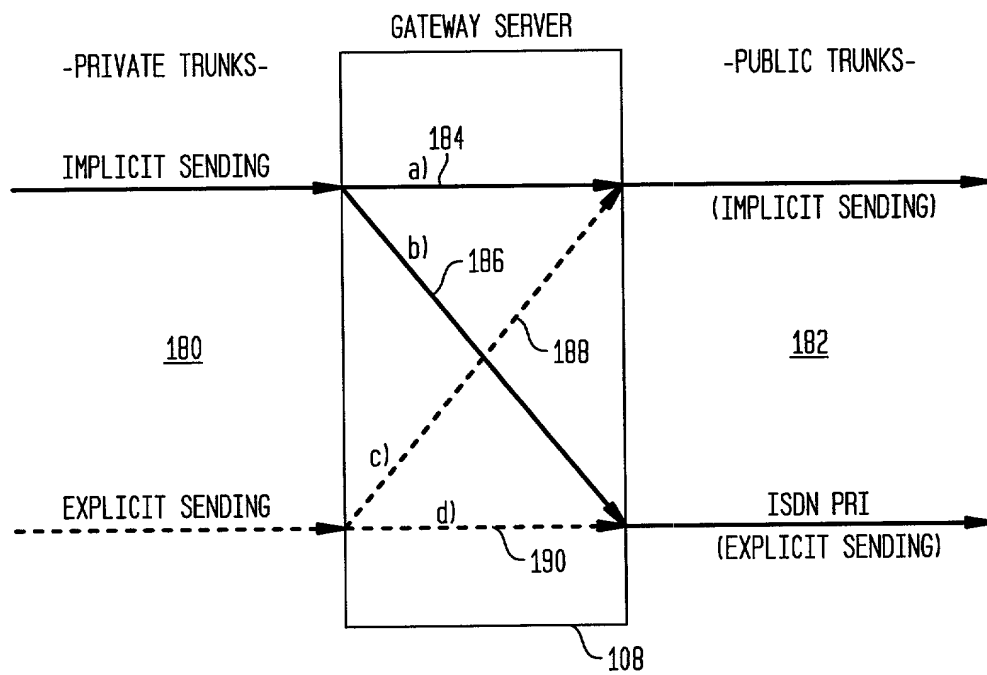

2002P01701US

4/4

FIG. 4

200	Carrier-Identification-Code-Operations {iso(1) identified-organization(3) icd-ecma(0012) member-company(2) siemens-units(1107) etc(1)} DEFINITIONS EXPLICIT TAGS ::=
	BEGIN IMPORTS OPERATION, FROM Remote-Operation-Notation {joint-iso-ccitt(2) remote-operations(4) notation(0)}
	xyz OBJECT IDENTIFIER ::=
	{iso(1) identified-organization(3) icd-ecma(0012) member-company(2) siemens-units(1107) etc(1)}
202	--Carrier Identification Code privCIC ::= OPERATION ARGUMENT CicArg
204	CicArg ::= SEQUENCE { cic ... [0] IMPLICIT CIC --Ellipsis
210	CIC ::= SEQUENCE { typeOfNwId nwIdPlan nwIdentification TypeOfNwId, NwIdPlan, NwIdentification }
212	--Type of Network Identification typeOfNwIdMin INTEGER ::=0 typeOfNwIdMax INTEGER ::=7 TypeOfNwId ::= INTEGER { userSpecified(0), nationalNwId(2), internationalNwId(3) } (typeOfNwIdMin..typeOfNwIdMax)
222	--Network Identification Plan nwIdPlanMin INTEGER ::=0 nwIdPlanMax INTEGER ::=15 NwIdPlan ::= INTEGER { unknown(0), carrierIdentificationCode(1), dataNwIdentificationCode(3) } (nwIdPlanMin..nwIdPlanMax)
232	--Network Identification nwIdentificationMin INTEGER ::=1 nwIdentificationMax INTEGER ::=32 NwIdentification ::= IA5String (SIZE(nwIdentificationMin..nwIdentificationMax))
234	privCIC PrivCIC ::=globalValue {xyz privCIC (nn) }
	END

2002P01701US